
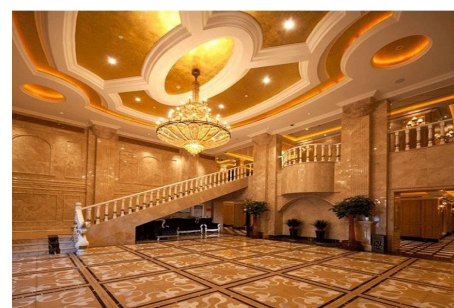
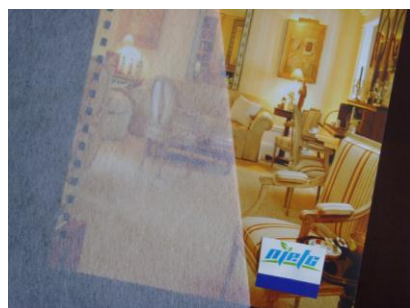


PRODUCT DESCRIPTION

Fiberglass facing tissue is used for new decorative substrate for mineral products , cotton , board and glass curtain wall. Widely used for public entertainment, star hotels, shopping malls, conference hall, offices, residential,etc. Facing tissue coated with paint has the characteristic of fire resistance, water proof, anti-mildew, germ-proof and anti-cracking. It is a good substrate for building decorative materials.



CHARACTERISTICS

Fiber Uniformly Dispersed
 Smooth Surface, Less Wool Yarn
 Easy to Coating a Variety of Paints
 The Gypsum Board Made of Facing Tissue Has The Advantage of Sound-proof, Flame Retardant, Antiseptic, etc

TECHNICAL DATA

Product Code	Unit Weight	LOI	MD Tensile Strength	CD Tensile Strength	Wet Tensile Retention MD	Moisture Content
	g/m ²	%	N/5CM	N/5CM	%	%
F-TM40	40	≤25	≥130	≥55	≥60	≤ 1.0
F-TM50	50	≤25	≥150	≥70	≥60	≤ 1.0
F-TM100	100	≤25	≥450	≥250	≥60	≤ 1.0
Testing Basis	ISO3374	ISO 1887	ISO3342	@25°C/10min	ISO 3344	
Paper core diameter: 152/305mm						

Remark: 1. Other specification can be customized according to customer' s demand.
 2. The technical data above is for reference only

PACKING

Every roll in plastic film without pallet.

STORAGE

This product should be stored in a dry, ventilated and rainproof place, with temperatures from 5°C to 35°C and humidity between 35% and 65%. It is recommended to be kept in intact package when not used to avoid damp.

Version #: No.201911

Address: No.20 Jiangjun Ave., Nanjing, P.R. China

Tel.: 0086 25 52270147 / 58321911

URL: www.fiberglassnonwoven.com

Fax: 0086 25 58321442

E-mail: sales@njefg.com

WhatsApp: 0086 18851651909